



VRLA Rechargeable Battery

BPL95-12 (BPL95-12FR)



FEATURES

- Maintenance free(no water topping-up required).
- No free acid(Non-spillable battery).
- Low self-discharge rate, lower than 3% capacity loss per month.
- Can be used in any orientation(excluding used inverted).
- Filtered with explosion proof filter.
- Flame-arrestor is installed to ensure safety.
- Carry handles for easy installation.

APPLICATION

- UPS
- Telecom
- Golf-carts



SPECIFICATIONS

Nominal Voltage	12 V
Nominal Capacity	95.0Ah @ 20 hour rate F.V.(1.75V/cell)
Approx. Weight	33.2Kg(73.2lbs.)
Terminals	B3 (Fitting M6 bolt & nut) I2 is optional
Internal Resistance	≤4.5mΩ (Fully Charged)
Max. Discharge Current	800 A (5 sec.)
Max. Charge Current	28.5 A
Operating Temperature Range	Charge : 0°C~40°C(32°F~104°F) Discharge : -20°C~50°C(-4°F~122°F) Storage. : -20°C~40°C(-4°F~104°F)
Container Material	ABS(UL94-HB, UL94-V0 is optional)



ISO 9001	
ISO14001	
UL	
CE	
<ul style="list-style-type: none"> ● IEC60896 ● JIS C 8704 ● GB/T 19638 	

DIMENSION(mm/inch)

OUTER DIMENSIONS

TERMINAL TYPE

- **Length**
329±2.0 (12.95±0.08)
- **Width**
172±2.0 (6.77±0.08)
- **Container Height**
215±2.0 (8.46±0.08)
- **Total Height**
B3:238±2.0 (9.37±0.08)
I2:220±2.0 (8.66±0.08)

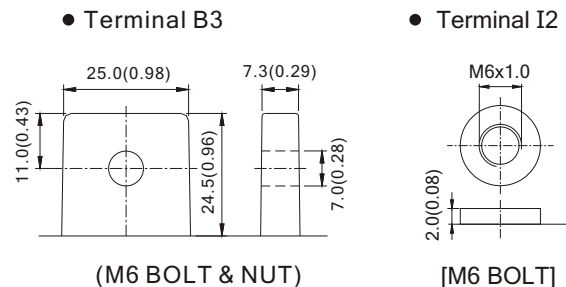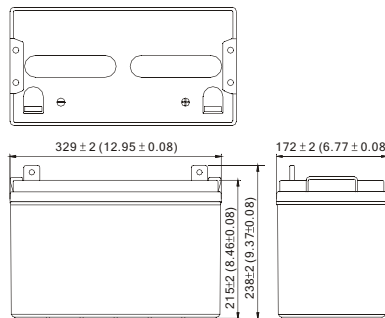

Terminal Hardware Initial Torque: B3/I2(5.5Nm±5%)

Constant power discharge characteristics at 25 °C/77 °F Unit: W

Discharge Time F.V. (V/cell)	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
1.80V	2530	2007	1201	654.7	275.6	191.0	106.44	55.70
1.75V	2734	2129	1246	675.1	281.4	193.9	108.05	57.00
1.70V	2899	2228	1274	686.8	284.3	194.7	108.63	57.16
1.65V	2995	2280	1292	695.5	285.8	195.4	108.92	57.30
1.60V	3080	2326	1304	702.8	287.2	195.4	108.92	57.30

Constant current discharge characteristics at 25 °C/77 °F Unit: A

Discharge Time F.V. (V/cell)	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
1.80V	230	181	106.3	55.0	23.0	15.9	8.87	4.64
1.75V	252	194	110.2	56.7	23.5	16.2	9.00	4.75
1.70V	267	203	112.7	57.7	23.7	16.2	9.05	4.76
1.65V	276	207	114.3	58.4	23.8	16.3	9.08	4.78
1.60V	284	211	115.4	59.1	23.9	16.3	9.08	4.78

All data shall be changed without prior notice, BB reserves the right to explain and update the information contained hereinto.