



GEL Technology Battery
GBC Deep Cycling

GBC 12/70

12V, 70Ah/C5

FEATURES

- GBC was designed with solid lead plated and gelled electrolyte technology.
- A deep-cycle lead-acid battery is designed to deliver a maximum capacity and cycles as discharging.
- High temperature stability, mechanical strength and low acid displacement.
- Superior performance with deep discharges.
- Patented safety valve to have accurate pressure operating for long battery life.

APPLICATION

- Golf Cars
- Power Wheelchairs
- Floor Sweepers
- Recreational Vehicle (RV)
- Renewable Energy



SPECIFICATIONS

Nominal Voltage	12 V
Nominal Capacity	70 Ah @ 5 hour rate F.V.(1.70V/cell)
Approx. Weight	29500g(65.04lbs.)
Terminals	I2
Internal Resistance	≤6mΩ (Fully Charged)
Max. Discharge Current	700 A (5 sec.)
Max. Charge Current	16.0 A
Self Discharge	< 2% per month (25°C)
Operating Temperature Range	-20°C~55°C(-4°F~131°F)
Container Material	ABS(UL94-HB, UL94-V0 is optional)



ISO 9001	
ISO14001	
UL	
CE	
● GB/T 7403.1-2008	
● IEC60254-1: 2005	

DIMENSION(mm/inch)

OUTER DIMENSIONS

TERMINAL TYPE

- **Length**
329.0±2 (12.95±0.08)
- **Width**
172.0±2(6.77±0.08)
- **Container Height**
214.5±2 (8.44±0.08)
- **Total Height**
219±2 (8.60±0.08)

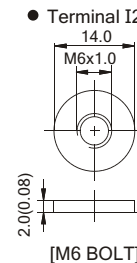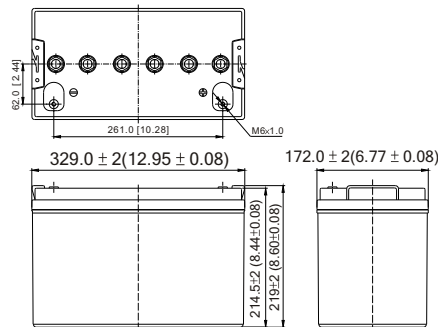

Terminal Hardware Initial Torque: I2(5.5Nm±5%)

Constant power discharge characteristics at 25 °C/77 °F

Unit: W

Discharge Time F.V. (V/cell)	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
1.80V	911	546	237	163.9	88.0	46.80
1.75V	974	559	241	166.4	89.1	47.64
1.70V	1005	572	243	167.8	90.1	48.11
1.65V	1017	578	245	168.5	90.7	48.24
1.60V	1024	579	246	168.9	90.8	48.36

Constant current discharge characteristics at 25 °C/77 °F

Unit: A

Discharge Time F.V. (V/cell)	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
1.80V	76.3	45.8	19.88	13.67	7.36	3.92
1.75V	81.6	46.9	20.15	13.88	7.47	3.99
1.70V	84.2	47.9	20.33	14.00	7.55	4.03
1.65V	85.2	48.3	20.46	14.07	7.59	4.04
1.60V	85.8	48.5	20.58	14.10	7.61	4.05

All data shall be changed without prior notice, BB reserves the right to explain and update the information contained hereinto.