



## VRLA Rechargeable Battery

# BPS100-12 (BPS100-12FR)

### FEATURES

- Maintenance free(no water topping-up required)
- No free acid(Non-spillable battery)
- Can be used in any orientation(excluding used inverted)
- Flame-arrestor is installed to ensure safety
- Carry handles for easy installation
- Absorbent Glass Mat technology for efficient gas recombination

### APPLICATION

- UPS
- Golf-Carts
- Telecom

### SPECIFICATIONS

Nominal Voltage	12V	
Nominal Capacity	20 Hour Rate (5.0A, 10.5V)	100 Ah
	10 Hour Rate (9.5A, 10.5V)	95 Ah
	5 Hour Rate (17.0A, 10.5V)	85 Ah
	1 Hour Rate (60.0A,9.3V)	60 Ah
Approx. Weight	32.7Kg(72.10lbs.)	
Terminals	B3 (Fitting M6 bolt & nut) I2 is optional	
Max. Discharge Current	800 A (5 sec.)	
Max. Charge Current	30 A	
Operating Temperature Range	Charge	0°C~40°C(32°F~104°F)
	Discharge	-20°C~50°C(-4°F~122°F)
	Storage	-20°C~40°C(-4°F~104°F)
Self Discharge	< 3% per month (25°C)	
Internal Resistance	≤ 4.5mΩ (Fully Charged )	



### CONTAINER MATERIAL

- BPS100-12:  
ABS: UL 94-HB (Dark gray color)
- BPS100-12FR:  
ABS: UL 94-V0 (Light gray color)

  <b>ISO 9001</b>	 <b>ISO 14001</b>
 <b>UL</b>	 <b>CE</b>
● IEC60896	● JIS C 8704
● GB/T 19638	

OUTER DIMENSIONS mm(inch)	Length (L)	Width (W)	Container Height (H)	Total Height (TH)
	329±2.0(12.95±0.08)	172±2.0(6.77±0.08)	215±2.0(8.46±0.08)	238±2.0(9.37±0.08)

### TERMINAL TYPE


- Terminal B3
 

(M6 BOLT & NUT)
- Terminal I2
 


[M6 BOLT]

Terminal Hardware Initial Torque: B3,I2(5.5Nm±5%)

**BPS100-12 (BPS100-12) discharge characteristics (25°C /77°F)**

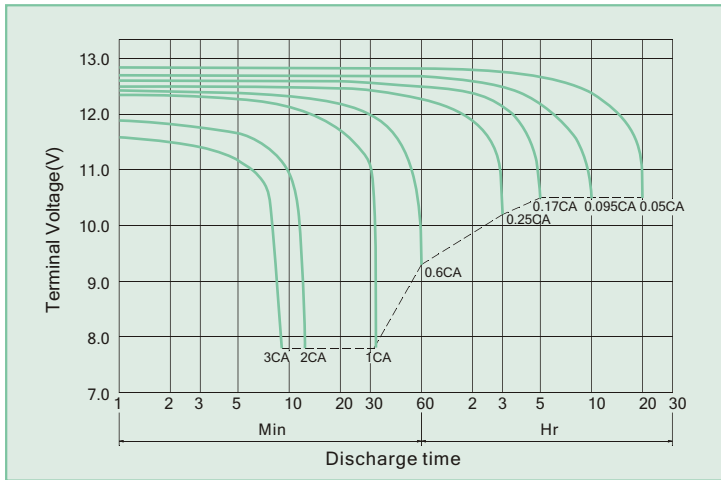


**Battery Charging Characteristics**

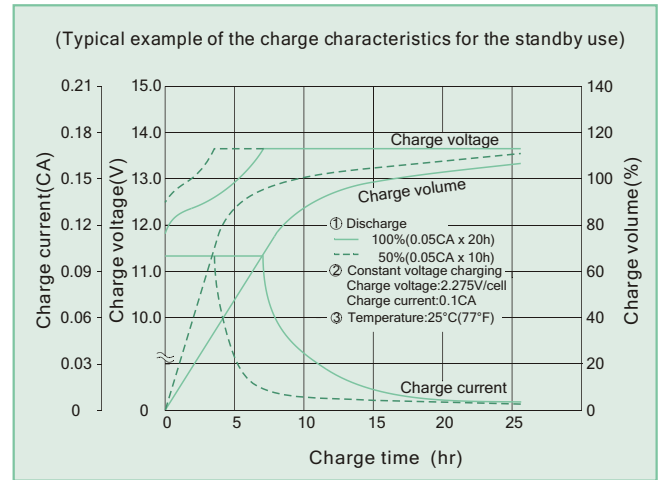

**Charging Procedure**

Application	Charging method	Charging Voltage at 25°C (V/cell)	Temperature compensation coefficient of charging voltage (mV/°C /cell)	Max. charging current (CA)	Charging time 0.1CA, 25°C (h)		Temp (°C)
					100% discharge	50% discharge	
For standby power Source	Constant voltage & Constant current charging (with current restriction)	2.25~2.30	-3	0.3	24	20	0~40 (32~104°F)
For cycle service		2.40~2.50	-4	0.3	16	10	

**Effect Of Temperature On Long Term Float Life**

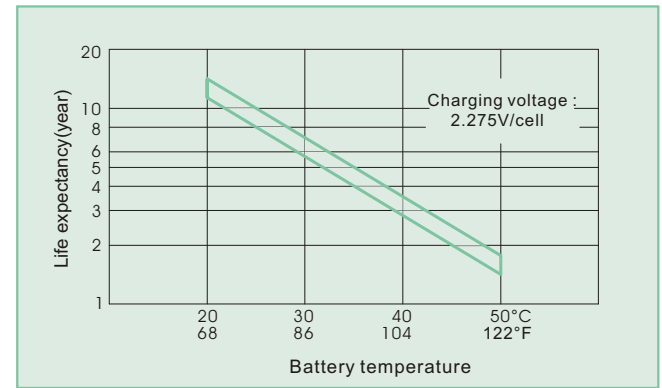

**Constant power discharge characteristics at 25 °C/77 °F Unit: W**

F.V. (V/cell) \ Discharge Time	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
1.80V	2530	2065	1256	727.8	291.5	201.0	112.31	59.10
1.75V	2740	2160	1304	749.6	297.3	204.0	114.00	60.00
1.70V	2839	2226	1334	763.1	300.0	205.1	114.57	60.31
1.65V	2907	2278	1353	772.3	302.1	205.8	114.91	60.48
1.60V	2965	2323	1366	780.0	303.9	206.4	114.91	60.48

**Constant current discharge characteristics at 25 °C/77 °F Unit: A**

F.V. (V/cell) \ Discharge Time	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
1.80V	228.1	184.6	107.5	61.16	24.29	16.75	9.36	4.93
1.75V	247.2	193.0	111.6	62.99	24.78	17.00	9.50	5.00
1.70V	256.0	199.0	114.2	64.13	25.00	17.09	9.55	5.03
1.65V	267.0	203.6	115.8	64.90	25.17	17.15	9.58	5.04
1.60V	277.3	207.7	116.9	65.55	25.33	17.20	9.58	5.04

All data shall be changed without prior notice, BB reserves the right to explain and update the information contained hereinto.

A/0 REV. Aug. 2009

**USA:**  
B&B BATTERY(USA) INC.  
6415 RANDOLPH ST.COMMERCE, CA,90040 U.S.A.  
TEL:1-323-278-1900.1-800-278-8599  
FAX:1-323-278-1268  
E-Mail:sales@bb-battery.com

**CHINA FACTORY:**  
B. B. BATTERY CO., LTD.  
CHENG DONG TRIAL AREA,HUANG GANG,  
RAOPING, GUANG DONG,CHINA,515700  
TEL:86-768-7601001-2  
FAX:86-768-7601469  
E-Mail:maggy@bb-battery.com

**EUROPE:**  
B&B BATTERY(EUROPE) B.V.  
LAAN VAN KRONENBRUG 8, 1183AS  
AMSTELVEEN, THE NETHERLANDS  
TEL: +852-91282711  
MOBILE: +852-91282711  
E-Mail: dliu@bb-battery.com

**HONG KONG:**  
NATIONAL TRADING LTD.  
TEL:852-2301-3800  
FAX:852-2739-1182  
E-Mail:bbhk@hkstar.com

**JAPAN:**  
B&B BATTERY(JAPAN) CO., LTD.  
1375-11 NARAHARA-MACHI,HACHIOJI,  
TOKYO 193-0803,JAPAN.  
TEL:81-426-25-6375  
FAX:81-426-25-6375  
E-Mail:miyata@bb-battery.com

**TAIWAN:**  
B. B. BATTERY(TAIWAN) CO., LTD.  
TEL:886-6-502-5150  
FAX:886-6-589-8087  
E-Mail:maggy@bb-battery.com