

## FEATURES

- The sulfuric acid is mixed with silica fume, which makes the resulting mass gel-like and immobile.
- Increased durability and deep cycle ability for heavy demand.
- High temperature stability, mechanical strength and low acid displacement.
- Superior performance with deep discharges.
- Patented safety valve to have accurate pressure operating for long battery life.

## APPLICATION

- UPS
- Security
- Telecommunication
- Electronic Medical Equipment
- Emergency Lighting



## SPECIFICATIONS

Nominal Voltage	12 V
Nominal Capacity	70 Ah @ 20 hour rate F.V.(1.75V/cell) 65 Ah @ 10 hour rate F.V.(1.80V/cell)
Approx. Weight	24000g(25.91lbs.)
Terminals	I2
Internal Resistance	≤6mΩ (Fully Charged )
Max. Discharge Current	400 A (5 sec.)
Max. Charge Current	14.0 A
Self Discharge	< 2% per month (25°C)
Operating Temperature Range	-20°C~55°C(-4°F~131°F)
Container Material	ABS(UL94-HB, UL94-V0 is optional)

ISO 9001



ISO14001



UL



CE





- GB/T 19638.2-2005
- IEC60896-2/1/22 2004

## DIMENSION(mm/inch)

## OUTER DIMENSIONS

## TERMINAL TYPE

- **Length**  
259.5±2 (10.22±0.06)
- **Width**  
172.6±2 (6.80±0.06)
- **Container Height**  
200.5±2 (7.89±0.06)
- **Total Height**  
217.0±2 (8.54±0.06)

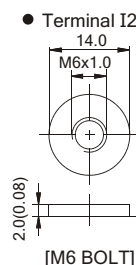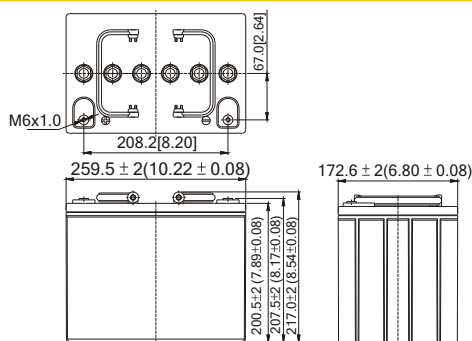

Terminal Hardware Initial Torque: I2(5.5Nm±5%)

## Constant power discharge characteristics at 25 °C/77 °F

Unit: W

Discharge Time F.V. (V/cell)	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
1.80V	786	465	203.0	148.5	78.0	41.37
1.75V	798	479	207.1	150.7	79.8	42.00
1.70V	804	489	209.6	152.0	80.4	42.33
1.65V	807	495	211.2	152.6	80.7	42.46
1.60V	807	500	212.3	153.0	80.7	42.46

## Constant current discharge characteristics at 25 °C/77 °F

Unit: A

Discharge Time F.V. (V/cell)	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
1.80V	65.5	39.6	17.00	12.41	6.50	3.448
1.75V	66.5	40.8	17.34	12.60	6.65	3.500
1.70V	67.0	41.7	17.55	12.71	6.70	3.528
1.65V	67.2	42.2	17.69	12.75	6.72	3.538
1.60V	67.2	42.6	17.78	12.79	6.72	3.538

All data shall be changed without prior notice, BB reserves the right to explain and update the information contained hereinto.